

ARIES

CALCOR pH NEUTRALIZATION

INLINE SERIES, SINGLE-BED, DROP-IN CARTRIDGE

**PH NEUTRALIZATION
MINERALIZATION
CORROSION CONTROL**

Aries Calcor Cartridges contain a unique blend of Calcite® and Corosex®. The unique combination of media ensure pH correction over a wider range thereby ensuring a more consistently balanced effluent without the negative impact of over correction. Available in Quick Connect or 1/4" FNPT connectors in 5 and 10" lengths. Aries Inline filters cartridges are designed for low-flow, point-of-use filtration.

APPLICATIONS

- Post RO
- Water Coolers
- Food and Bev
- Water and Ice

MEDIA


- Calcor (100%)

CERTIFICATIONS

- WQA Gold Seal
- California Prop. 65 Compliant

SPECIFICATIONS

- Nominal Rating of 25µ
- Max Pressure of 125 psi (861.85 kpa)
- Max Temperature 100°F (37.8 °C)

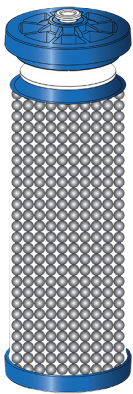

HIGHLIGHTS

- Controls pH Corrosion
- Allows Mineralization
- Calcor pH Neutralization Media
- Fits Standard Residential & Industrial Size Housing
- Oversized Cartridge for Maximum Media Fill
- Quality Produced & Made in the USA
- WQA Gold Seal Certified

DIMENSIONS	SERVICE FLOW	MAX FLOW	CAPACITY	PART NUMBER
6 x 2 in. (Quick Connect)	0.2 gpm (.76 lpm)	-	2300 gallons (8,706 liters)	IFB-06-3232-QC
12 x 2 in. (Quick Connect)	0.4 gpm (1.51 lpm)	-	4600 gallons (17,413 liters)	IFB-12-3232-QC
6 x 2 in. (1/4 in. FNPT)	0.2 gpm (.76 lpm)	-	2300 gallons (8,706 liters)	IFB-06-3232-FT
12 x 2 in. (1/4 in. FNPT)	0.4 gpm (1.51 lpm)	-	4600 gallons (17,413 liters)	IFB-12-3232-FT



COMPONENT

Filter cartridge Certified to NSF/ANSI Standard 42 and NSF/ANSI Standard 61 for material requirement(s) only. Filter cartridge Certified to NSF/ANSI Standard 372 for low lead compliance.

Revision 1.0

© 2020 ResinTech, Inc.

