


ARIES FLUORIDE REMOVAL

FLUORIDE REMOVAL

INLINE SERIES, SINGLE-BED, DROP-IN CARTRIDGE

Aries fluoride removal cartridges utilize the advanced media technology of ResinTech® SIR-900 media, a synthetic aluminum oxide that remove Fluoride by a chemical reaction with the media. ResinTech® SIR-900 has minimal shrinkage /swelling and low-pressure loss, and can be used over a wide pH range. These high capacity cartridges are available in Quick Connect or 1/4" FNPT connectors in 5 and 10" lengths. Aries Inline filters cartridges are designed for low-flow, point-of-use filtration.

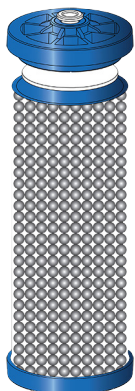

HIGHLIGHTS

- High Capacity Fluoride Removal
- Resintech® SIR-900
- Fits Standard Residential & Industrial Size Housing
- Oversized Cartridge for Maximum Media Fill
- Quality Produced & Made in the USA
- WQA Gold Seal Certified

APPLICATIONS

- Drinking Water

MEDIA

- ResinTech® SIR-900 (100%)

CERTIFICATIONS

- WQA Gold Seal
- California Prop. 65 Compliant

SPECIFICATIONS

- Nominal Rating of 25µ
- Max Pressure of 125 psi (861.85 kpa)
- Max Temperature 100°F (37.8 °C)

DIMENSIONS	SERVICE FLOW	MAX FLOW	CAPACITY	PART NUMBER
6 x 2 in. (Quick Connect)	0.1 gpm (.38 lpm)	-	133 gallons (503 liters)	IFB-06-3690-QC
12 x 2 in. (Quick Connect)	0.2 gpm (.76 lpm)	-	266 gallons (1,007 liters)	IFB-12-3690-QC
6 x 2 in. (1/4 in. FNPT)	0.1 gpm (.38 lpm)	-	133 gallons (503 liters)	IFB-06-3690-FT
12 x 2 in. (1/4 in. FNPT)	0.2 gpm (.76 lpm)	-	266 gallons (1,007 liters)	IFB-12-3690-FT



COMPONENT

Filter cartridge Certified to NSF/ANSI Standard 42 and NSF/ANSI Standard 61 for material requirement(s) only. Filter cartridge Certified to NSF/ANSI Standard 372 for low lead compliance.

Revision 1.0

© 2020 ResinTech, Inc.

