

PRODUCT SPECIFICATION SHEET

MAGNA SBACR-MP-HP

STRONG BASE ANION

HIGH-PURITY GRADE
TYPE I ANION
ACRYLIC MACROPOROUS
CHLORIDE FORM

ResinTech SBACR-MP-HP is a high purity acrylic macroporous strong base anion resin in chloride form. The 'HP' designation means it is Gold Seal Certified by the WQA for use in potable water applications. Its chemical and physical properties are similar to other resins in the SBACR-MP family. SBACR-MP-HP is intended for use for the removal of NOM (naturally occurring organic matter) & other applications that require potable water certification.

APPLICATIONS

- Organic Removal - Municipal



TYPICAL PROPERTIES & PHYSICAL CHARACTERISTICS	
Polymer Matrix	Acrylic Macroporous
Ionic Form	Chloride
Functional Group	Quaternary Amine
Physical Form	Spherical Beads
Particle Size	16 to 50 US Mesh (297 - 1190 µm)
% < 50 mesh (300µm)	< 1%
Minimum Sphericity	90%
Uniformity Coefficient	1.7
Reversible Swelling	Not recommended for use in the hydroxide form
Temp Limit	150°F (66°C)
Capacity (meq/mL)	0.75
Moisture Retention	61% to 70%
Shipping Weight	43 - 45 lbs/ft ³ (689 - 721 g/L)
Color	White to Cream
Regenerability	Yes

CERTIFICATIONS

- WQA Gold Seal*
- Kosher Certified
- FDA Compliance**

* NSF/ANSI/CAN 61: Drinking Water System Components - Health Effects

** Paragraph 21CFR173.25 of the Food Additives Regulations of the US FDA

Revision 1.3
ResinTech, Inc.®

PACKAGING OPTIONS




- 500 ml samples
- 1 ft³ bags
- 1 ft³ boxes
- 1 ft³ drums
- 7 ft³ drums
- 42 ft³ supersacks



MAGNA SBACR-MP-HP

STRONG BASE ANION

HIGH-PURITY GRADE
TYPE I ANION
ACRYLIC MACROPOROUS
CHLORIDE FORM

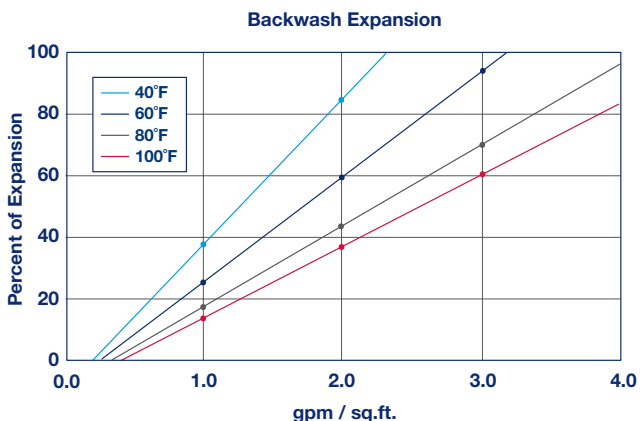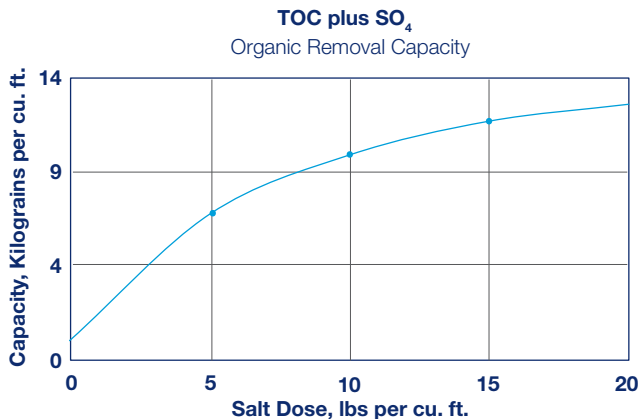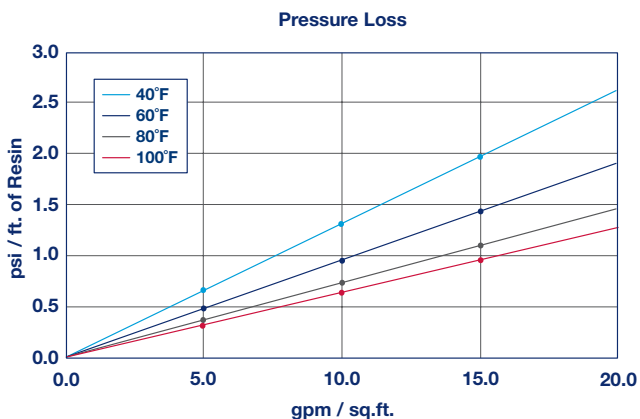

Capacity based on 2 gpm/cu.ft. flow rate, pH near neutral, and 36 inch minimum bed depth. Capacity is for TOC plus sulfate. No engineering downgrade has been applied.

SUGGESTED OPERATING CONDITIONS

Maximum continuous temperature	150°F
Chloride form	
Minimum bed depth	24 inches
Backwash expansion	25 to 50 percent
Maximum pressure loss	20 psi
Operating pH range	0 to 14 SU
Regenerant Concentration	
Salt cycle	2 to 10 percent NaCl
Regenerant level	4 to 10 lbs./cu.ft.
Regenerant flow rate.	0.25 to 1.0 gpm/cu.ft.
Regenerant contact time	>60 minutes
Displacement flow rate	Same as dilution water
Displacement volume	10 to 15 gallons/cu.ft.
Rinse flow rate	Same as service flow
Rinse volume	35 to 60 gallons/cu.ft.
Service flow rate	
Average Flow	1 to 4 gpm/cu.ft.
Peak Flow	<10 gpm/cu.ft.

Note: These guidelines describe average low risk operating conditions. They are not intended to be absolute minimums or maximums. For operation outside these guidelines, contact ResinTech Technical Support

ORGANIC TRAP

SBACR-MP-HP has the highest possible capacity for tannins and other naturally occurring organic matter (NOM) due to its acrylic polymer backbone and macroporous physical structure. Tannins and similar naturally occurring organics cause most of the color in potable waters. SBACR-MP-HP removes these substances and is easily regenerated with sodium chloride, in the same fashion as a water softener. Organic trap resins should be regenerated frequently to prevent the NOM from building up inside the resin beads and eventually causing fouling. Use of chloride form anion resin reduces the pH of the product water during the early part of the exhaustion cycle.

Revision 1.3
ResinTech, Inc.®

